

1

2

3

4

A

A

B

B

C


C

D

D

E

E

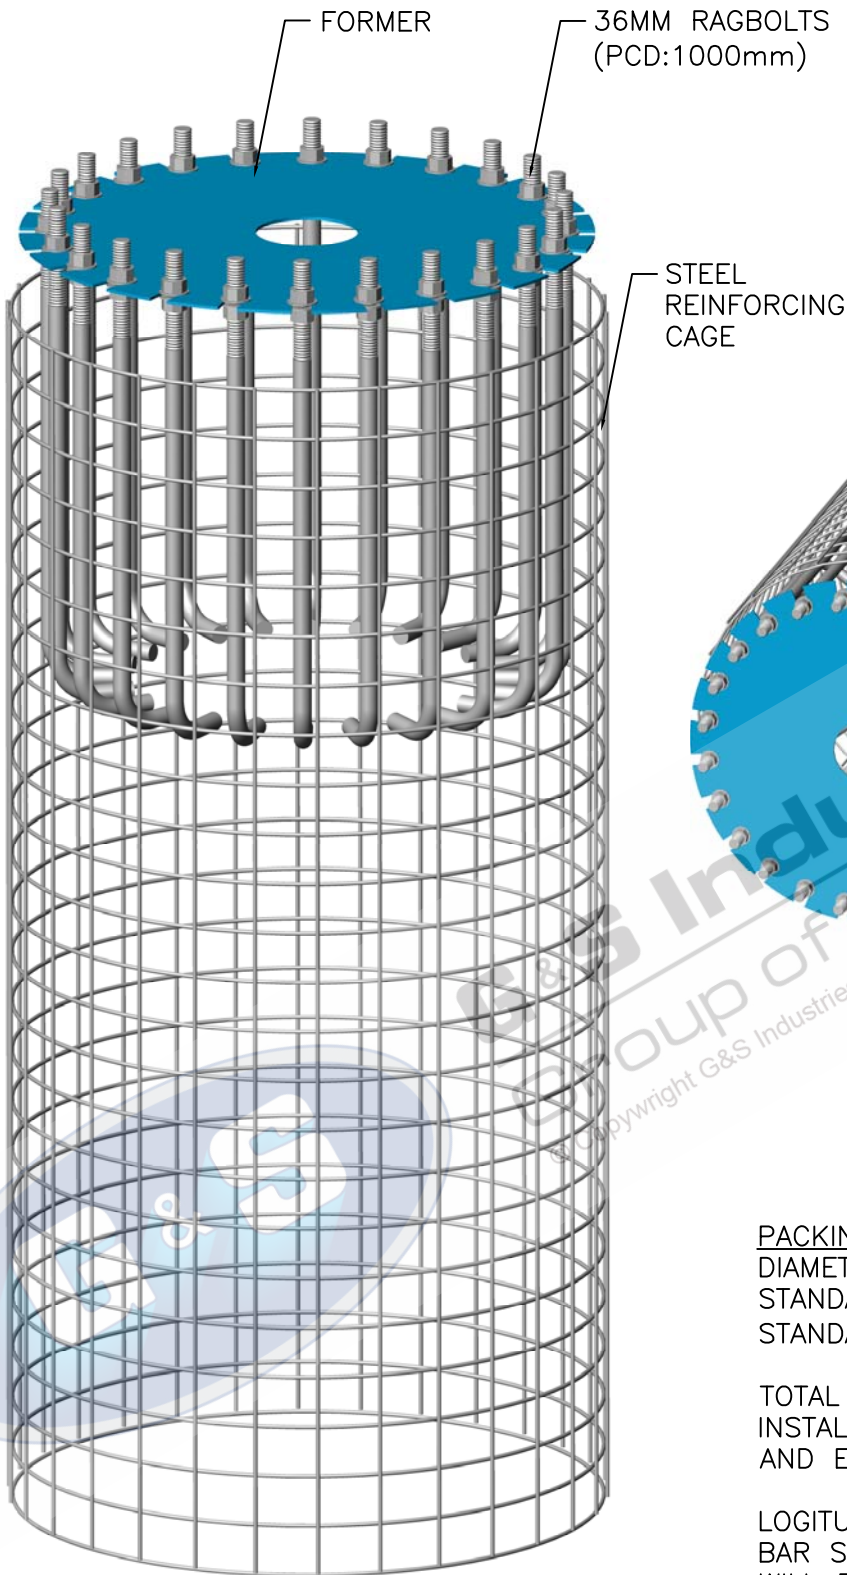

PACKING DIMENSIONS

DIAMETER: 1050mm
 STANDARD TOTAL HEIGHT: 5200mm
 STANDARD TOTAL WEIGHT: 635kg's

TOTAL HEIGHT MAY VARY WITH
 INSTALLATION SITE SOIL CONDITIONS
 AND ENGINEERING REQUIREMENTS.

LOGITUDINAL STEEL REINFORCING
 BAR SIZE AND LIGATURE SIZE
 WILL BE IN ACCORDANCE WITH
 ENGINEERING REQUIREMENTS.

STANDARDS

ALL PRODUCTS TO CONFORM TO THE FOLLOWING AUSTRALIAN STANDARDS

- * AS 3678: 1990 Structural steel – hot rolled plates, floor plates and slabs. Grade 250 up to 3mm and Grade 300 on 4mm plate.
- * AS 4680: 1999 Hot dipped galvanised (zinc) coating on fabricated ferrous articles.
- * AS 1554 1:2004 Structural steel welding – Part 1: welding of steel structures.
- * AS/NZS 1170 2:2002 Structural design actions – wind actions.
- * AS/NZS 1170 2:2002/AMDT 1:2005-06-03 Structural design actions – wind actions.
- * AS/NZS 4676:2000 Structural design requirements for utility service poles.



G&S Industries

97 GUTHRIE STREET, OSBORNE PARK W.A. 6017
 PH (08) 9446 8044. (08) 9446 8266
 FAX (08) 9446 5456

JOB NO.

DATE:

DESIGN:

S.G.

DRAWN:

Z.L.

CHECKED:

R.G.

APPROVED:

Y

LAST REVISED:

13 MAR '10

SCALE:

NTS

DRAWING:

ZLRG2399

REVISION:

03

1

2

3

4