

1

2

3

4

A

A

B


B

C

C

D

D

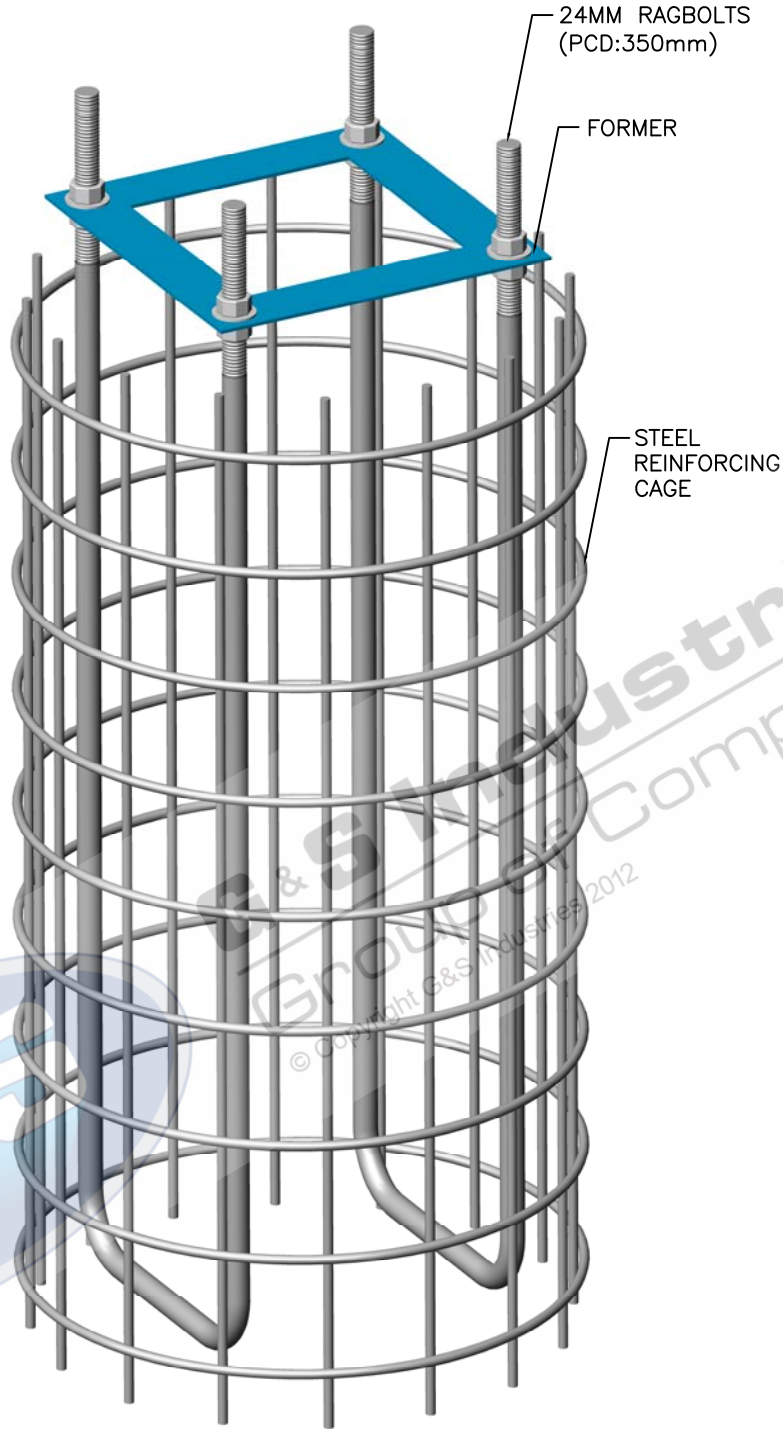

PACKING DIMENSIONS

DIAMETER: 450mm
STANDARD TOTAL HEIGHT: 1400mm
STANDARD TOTAL WEIGHT: 24kg's

TOTAL HEIGHT MAY VARY WITH INSTALLATION
SITE SOIL CONDITIONS AND
ENGINEERING REQUIREMENTS.

LONGITUDINAL STEEL REINFORCING BAR
SIZE AND LIGATURE SIZE WILL BE IN
ACCORDANCE WITH ENGINEERING
REQUIREMENTS.



G&S Industries
Group of Companies

**Client Drawing Approval
To Commence Production**

Client Name: _____

Authorized Person: _____

Signature: _____ Date Authorized: _____

STANDARDS
ALL PRODUCTS TO CONFORM TO THE FOLLOWING AUSTRALIAN STANDARDS

- * AS 3678: 1990 Structural steel – hot rolled plates, floor plates and slabs. Grade 250 up to 3mm and Grade 300 on 4mm plate.
- * AS 4680: 1999 Hot dipped galvanised (zinc) coating on fabricated ferrous articles.
- * AS 1554 1:2004 Structural steel welding – Part 1: welding of steel structures.
- * AS/NZS 1170 2:2002 Structural design actions – wind actions.
- * AS/NZS 1170 2:2002/AMDT 1:2005-06-03 Structural design actions – wind actions.
- * AS/NZS 4676:2000 Structural design requirements for utility service poles.



G&S Industries

97 GUTHRIE STREET, OSBORNE PARK W.A. 6017
PH (08) 9446 8044. (08) 9446 8266
FAX (08) 9446 5456

JOB NO.	DATE:
24MM CAGED RAGBOLT ASSEMBLY FULLY WELDED AND ASSEMBLED 890616 CR24/4/350	

DESIGN:	S.G.	DRAWN:	Z.L.
CHECKED:	R.G.	APPROVED:	Y
LAST REVISED:	12 MAR '10	SCALE:	NTS
DRAWING:	ZLRG2240	REVISION:	03

1

2

3

4

E

E