

1

2

3

4

A

A

B

B

C



C

D

D

E

E

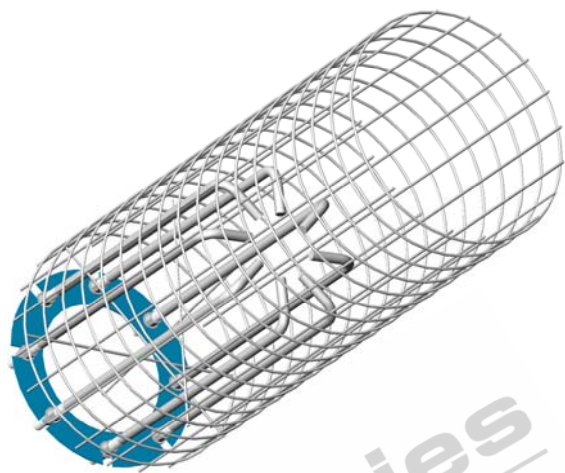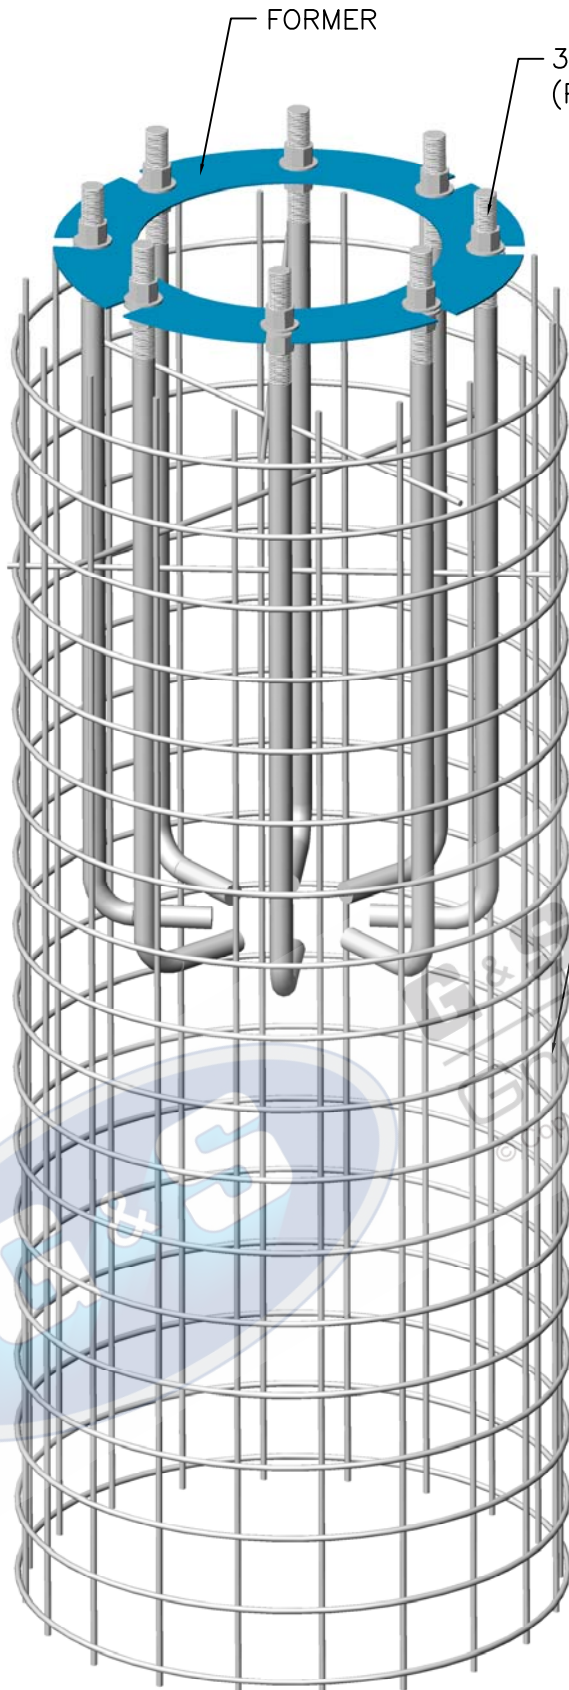

STEEL
REINFORCING
CAGE

PACKING DIMENSIONS

DIAMETER: 750mm
STANDARD TOTAL HEIGHT: 3500mm
STANDARD TOTAL WEIGHT: 151kg's

TOTAL HEIGHT MAY VARY WITH
INSTALLATION SITE SOIL CONDITIONS
AND ENGINEERING REQUIREMENTS.

LONGITUDINAL STEEL REINFORCING
BAR SIZE AND LIGATURE SIZE
WILL BE IN ACCORDANCE WITH
ENGINEERING REQUIREMENTS.



**Client Drawing Approval
To Commence Production**

Client Name: _____
Authorized Person: _____
Signature: _____ Date Authorized: _____

- STANDARDS**
ALL PRODUCTS TO CONFORM TO THE FOLLOWING AUSTRALIAN STANDARDS
- * AS 3678: 1990 Structural steel – hot rolled plates, floor plates and slabs. Grade 250 up to 3mm and Grade 300 on 4mm plate.
 - * AS 4680: 1999 Hot dipped galvanised (zinc) coating on fabricated ferrous articles.
 - * AS 1554 1:2004 Structural steel welding – Part 1: welding of steel structures.
 - * AS/NZS 1170 2:2002 Structural design actions – wind actions.
 - * AS/NZS 1170 2:2002/AMDT 1:2005-06-03 Structural design actions – wind actions.
 - * AS/NZS 4676:2000 Structural design requirements for utility service poles.



97 GUTHRIE STREET, OSBORNE PARK W.A. 6017
PH (08) 9446 8044. (08) 9446 8266
FAX (08) 9446 5456

JOB NO.	DATE:	DESIGN:	DRAWN:
		S.G.	Z.L.
30MM CAGED RAGBOLT ARRANGEMENT FULLY WELDED AND ASSEMBLED 890620 CR30/8/500		CHECKED:	APPROVED:
		R.G.	Y
		LAST REVISED:	SCALE:
		13 MAR '10	NTS
		DRAWING:	REVISION:
		ZLRG2244	03

1

2

3

4